


ลูกกลิ้งขับสายพานแบบหน้าเรียบ


Drive Pulley: Flat type

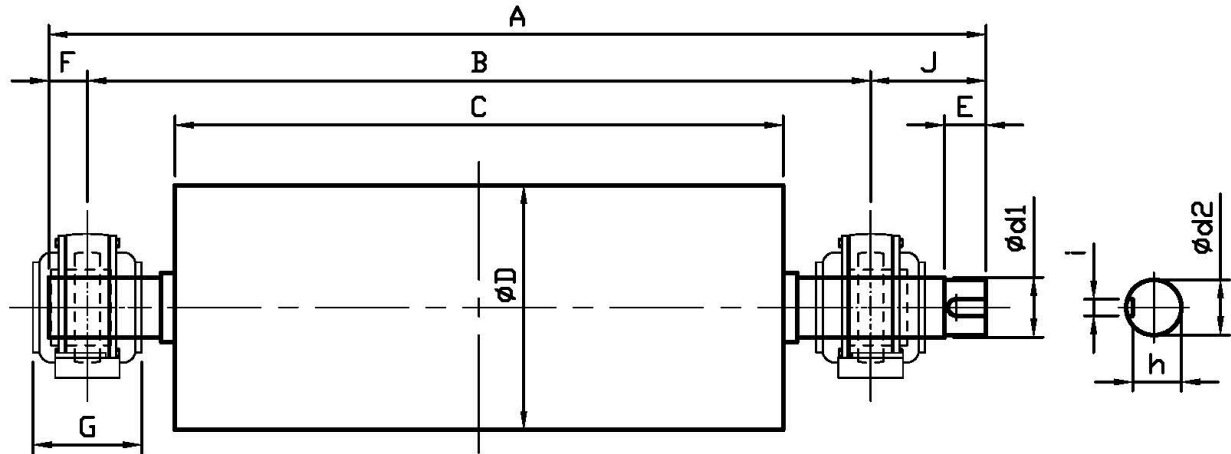

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	รุ่นแบริ่ง Bearing No
300	DPF-300-S	651	550	360	165	35	30	30	26	80	26.0	8	75	C-UCP207-D1
	DPF-300-L	667	550	360	215	40	35	32	32	90	30.0	10	85	C-UCP208-D1
400	DPF-400-S	767	650	460	215	40	35	32	32	90	30.0	10	85	C-UCP208-D1
	DPF-400-L	784	650	460	265	50	45	40	34	100	39.5	14	100	C-UCP210-D1
450	DPF-450-S	817	700	510	215	40	35	32	32	82	30.0	10	85	C-UCP208-D1
	DPF-450-L	857	700	510	265	60	55	45	42	115	49.0	16	115	C-UCP212-D1
500	DPF-500-L	887	730	560	265	60	55	45	42	115	49.0	16	115	C-UCP212-D1
600	DPF-600-L	1017	850	660	265	65	60	45	42	120	53.0	18	125	C-UCP213-D1
750	DPF-750-S	1196	1000	810	265	70	65	56	46	135	57.5	20	150	C-UCP214-D1
900	DPF-900-S	1396	1200	960	316	75	70	63	46	135	62.5	20	150	C-UCP215-D1

ลูกกลิ้งขับสายพานแบบหุ้มยางหน้าเรียบ


Drive Pulley: Rubberized/Flat type

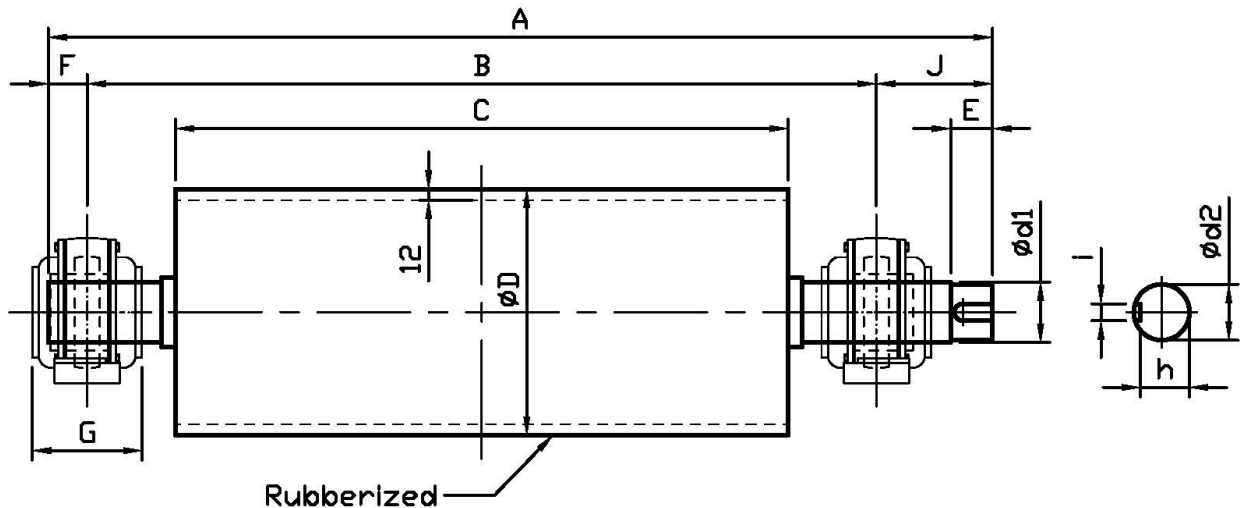

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	รุ่นแบริ่ง Bearing No
300	DPFR-300-S	651	550	360	189	35	30	30	26	80	26.0	8	75	C-UCP207-D1
	DPFR-300-L	667	550	360	239	40	35	32	32	90	30.0	10	85	C-UCP208-D1
400	DPFR-400-S	767	650	460	239	40	35	32	32	90	30.0	10	85	C-UCP208-D1
	DPFR-400-L	784	650	460	289	50	45	40	34	100	39.5	14	100	C-UCP210-D1
450	DPFR-450-S	817	700	510	239	40	35	32	32	82	30.0	10	85	C-UCP208-D1
	DPFR-450-L	857	700	510	289	60	55	45	42	115	49.0	16	115	C-UCP212-D1
500	DPFR-500-L	887	730	560	289	60	55	45	42	115	49.0	16	115	C-UCP212-D1
600	DPFR-600-L	1017	850	660	289	65	60	45	42	120	53.0	18	125	C-UCP213-D1
750	DPFR-750-S	1196	1000	810	289	70	65	56	46	135	57.5	20	150	C-UCP214-D1
900	DPFR-900-S	1396	1200	960	340	75	70	63	46	135	62.5	20	150	C-UCP215-D1

ลูกกลิ้งขับสายพานแบบหุ้มยางหน้าเรียบพร้อมกักร่อง


Drive Pulley: Rubberized/Flat type/Herring bone

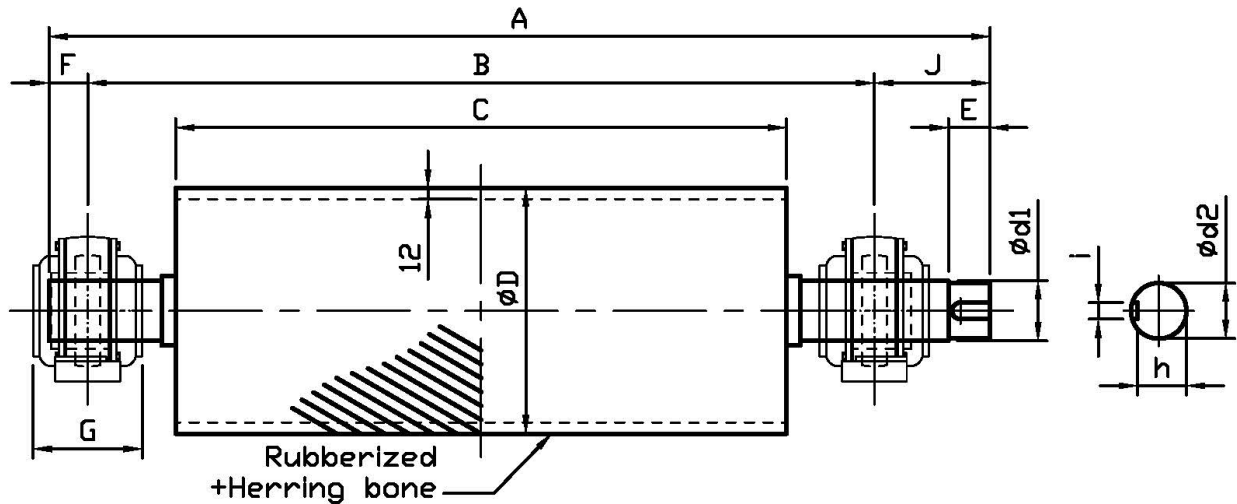

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	รุ่นแบริ่ง Bearing No
300	DPFRH-300-S	651	550	360	189	35	30	30	26	80	26.0	8	75	C-UCP207-D1
	DPFRH-300-L	667	550	360	239	40	35	32	32	90	30.0	10	85	C-UCP208-D1
400	DPFRH-400-S	767	650	460	239	40	35	32	32	90	30.0	10	85	C-UCP208-D1
	DPFRH-400-L	784	650	460	289	50	45	40	34	100	39.5	14	100	C-UCP210-D1
450	DPFRH-450-S	817	700	510	239	40	35	32	32	82	30.0	10	85	C-UCP208-D1
	DPFRH-450-L	857	700	510	289	60	55	45	42	115	49.0	16	115	C-UCP212-D1
500	DPFRH-500-L	887	730	560	289	60	55	45	42	115	49.0	16	115	C-UCP212-D1
600	DPFRH-600-L	1017	850	660	289	65	60	45	42	120	53.0	18	125	C-UCP213-D1
750	DPFRH-750-S	1196	1000	810	289	70	65	56	46	135	57.5	20	150	C-UCP214-D1
900	DPFRH-900-S	1396	1200	960	340	75	70	63	46	135	62.5	20	150	C-UCP215-D1

ลูกกลิ้งขับเคลื่อนสายพานแบบหน้าเรียว


Drive Pulley: Taper type

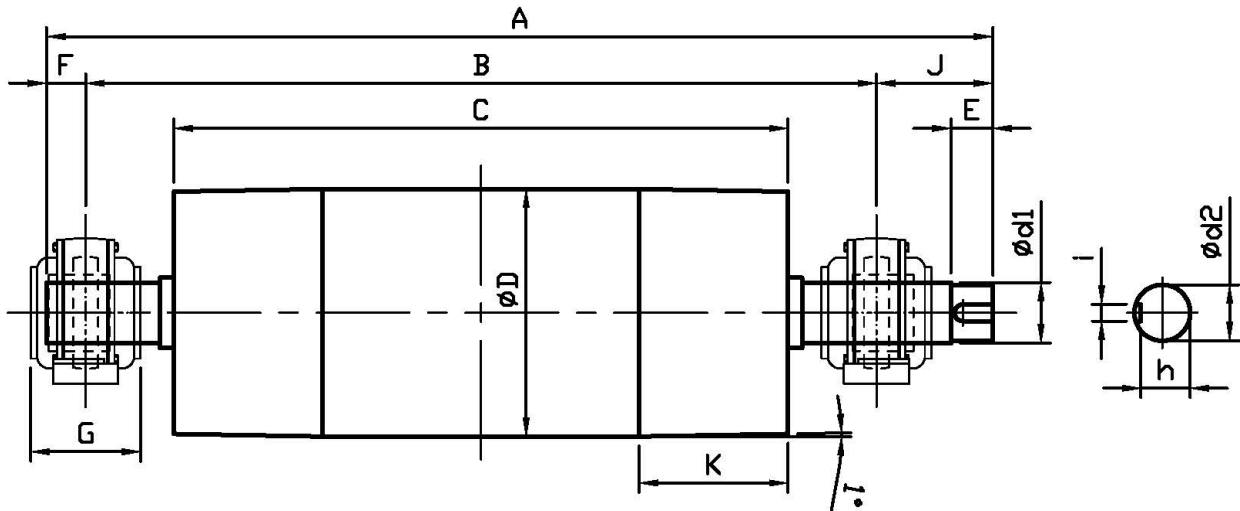

ความกว้างสายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	K	รุ่นแบริ่ง Bearing No
300	DPT-300-S	651	550	360	165	35	30	30	26	80	26.0	8	75	100	C-UCP207-D1
	DPT-300-L	667	550	360	215	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
400	DPT-400-S	767	650	460	215	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
	DPT-400-L	784	650	460	265	50	45	40	34	100	39.5	14	100	100	C-UCP210-D1
450	DPT-450-S	817	700	510	215	40	35	32	32	82	30.0	10	85	120	C-UCP208-D1
	DPT-450-L	857	700	510	265	60	55	45	42	115	49.0	16	115	120	C-UCP212-D1
500	DPT-500-L	887	730	560	265	60	55	45	42	115	49.0	16	115	140	C-UCP212-D1
600	DPT-600-L	1017	850	660	265	65	60	45	42	120	53.0	18	125	160	C-UCP213-D1
750	DPT-750-S	1196	1000	810	265	70	65	56	46	135	57.5	20	150	200	C-UCP214-D1
900	DPT-900-S	1396	1200	960	316	75	70	63	46	135	62.5	20	150	230	C-UCP215-D1

ลูกกลิ้งขับสายพานแบบหุ้มยางหน้าเรียบ


Drive Pulley: Rubberized/Taper type

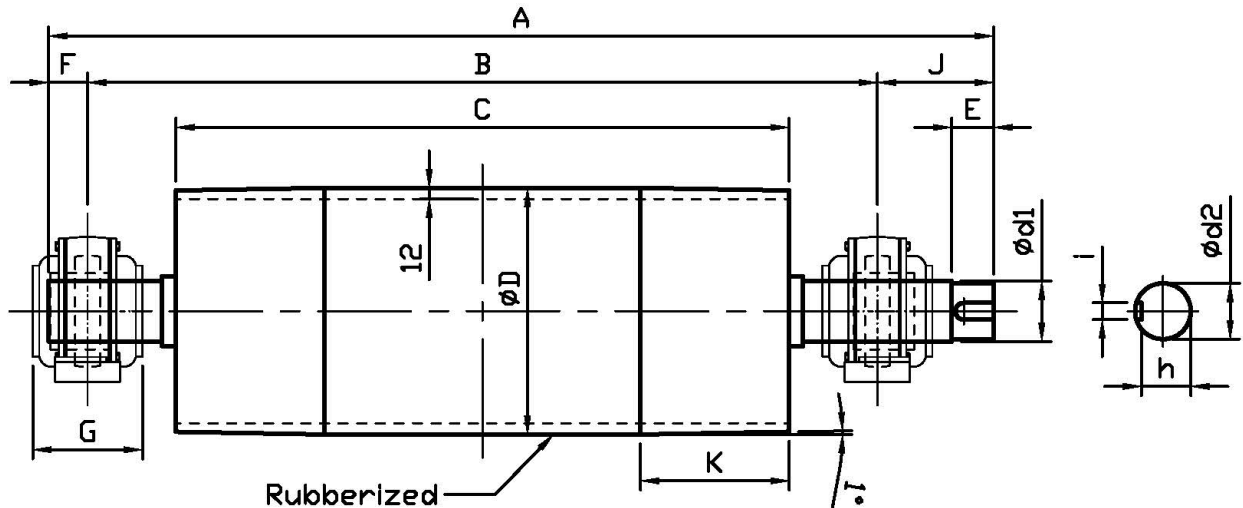

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	K	รุ่นแบริ่ง Bearing No
300	DPTR-300-S	651	550	360	189	35	30	30	26	80	26.0	8	75	100	C-UCP207-D1
	DPTR-300-L	667	550	360	239	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
400	DPTR-400-S	767	650	460	239	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
	DPTR-400-L	784	650	460	289	50	45	40	34	100	39.5	14	100	100	C-UCP210-D1
450	DPTR-450-S	817	700	510	239	40	35	32	32	82	30.0	10	85	120	C-UCP208-D1
	DPTR-450-L	857	700	510	289	60	55	45	42	115	49.0	16	115	120	C-UCP212-D1
500	DPTR-500-L	887	730	560	289	60	55	45	42	115	49.0	16	115	140	C-UCP212-D1
600	DPTR-600-L	1017	850	660	289	65	60	45	42	120	53.0	18	125	160	C-UCP213-D1
750	DPTR-750-S	1196	1000	810	289	70	65	56	46	135	57.5	20	150	200	C-UCP214-D1
900	DPTR-900-S	1396	1200	960	340	75	70	63	46	135	62.5	20	150	230	C-UCP215-D1

ลูกกลิ้งขับสายพานแบบหุ้มยางหน้าเรียวพร้อมกักร่อง


Drive Pulley: Rubberized/Taper type/Herring bone

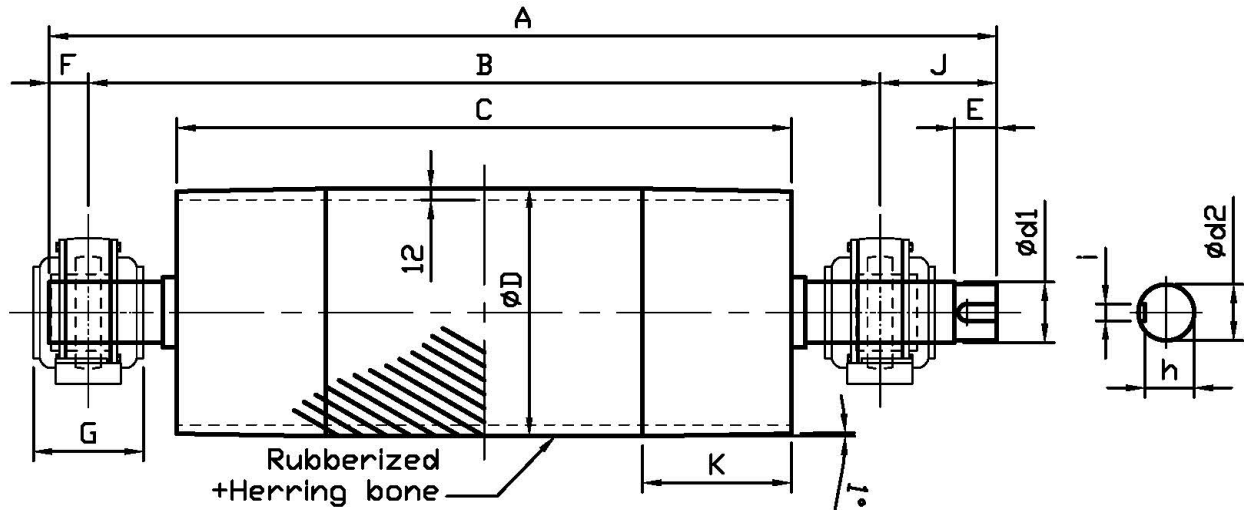

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d1	d2	E	F	G	h	i	J	K	รุ่นแบริ่ง Bearing No
300	DPTRH-300-S	651	550	360	189	35	30	30	26	80	26.0	8	75	100	C-UCP207-D1
	DPTRH-300-L	667	550	360	239	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
400	DPTRH-400-S	767	650	460	239	40	35	32	32	90	30.0	10	85	100	C-UCP208-D1
	DPTRH-400-L	784	650	460	289	50	45	40	34	100	39.5	14	100	100	C-UCP210-D1
450	DPTRH-450-S	817	700	510	239	40	35	32	32	82	30.0	10	85	120	C-UCP208-D1
	DPTRH-450-L	857	700	510	289	60	55	45	42	115	49.0	16	115	120	C-UCP212-D1
500	DPTRH-500-L	887	730	560	289	60	55	45	42	115	49.0	16	115	140	C-UCP212-D1
600	DPTRH-600-L	1017	850	660	289	65	60	45	42	120	53.0	18	125	160	C-UCP213-D1
750	DPTRH-750-S	1196	1000	810	289	70	65	56	46	135	57.5	20	150	200	C-UCP214-D1
900	DPTRH-900-S	1396	1200	960	340	75	70	63	46	135	62.5	20	150	230	C-UCP215-D1

ลูกกลิ้งตามสายพานแบบหน้าเรียว


Tail Pulley: Taper type

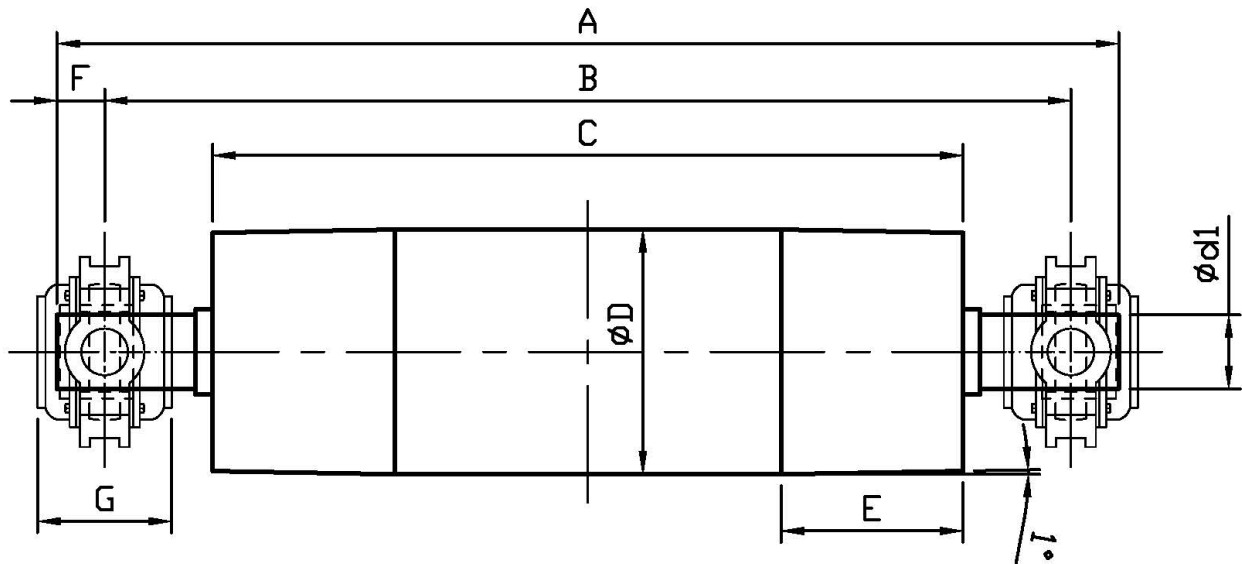

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d	E	F	G	รุ่นแบริ่ง Bearing No
300	TPT-300-S	502	450	360	165	35	100	26	80	C-UCT207-D1
	TPT-300-L	502	450	360	215	35	100	26	80	C-UCT207-D1
400	TPT-400-S	602	550	460	215	35	100	26	80	C-UCT207-D1
	TPT-400-L	614	550	460	265	40	100	32	90	C-UCT208-D1
450	TPT-450-S	652	600	510	215	35	120	26	80	C-UCT207-D1
	TPT-450-L	664	600	510	265	40	120	32	90	C-UCT208-D1
500	TPT-500-L	714	650	560	265	45	140	32	95	C-UCT209-D1
600	TPT-600-L	814	750	660	265	45	160	32	95	C-UCT209-D1
750	TPT-750-S	998	930	810	265	50	200	34	100	C-UCT210-D1
900	TPT-900-S	1168	1100	960	316	50	230	34	100	C-UCT210-D1

ลูกกลิ้งกลับสายพานแบบหน้าเรียบ

Snub Pulley: Flat type

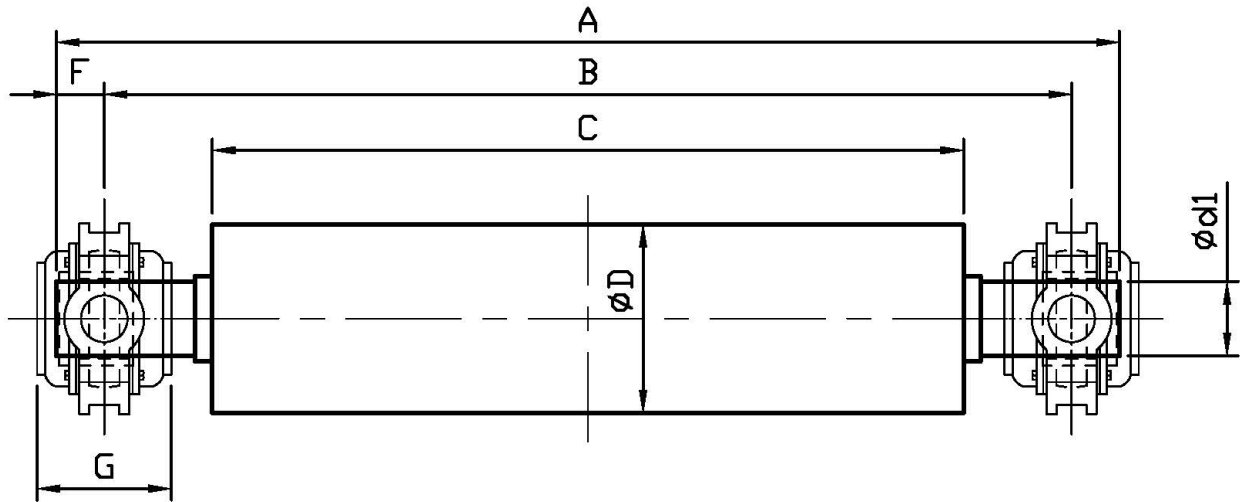

ความกว้าง สายพาน Belt Width	รุ่น Model	A	B	C	D	d	F	G	รุ่นแบริ่ง Bearing No
300	SPF-300-S	498	450	360	165	30	24	70	C-UCT206-D1
400	SPF-400-S	598	550	460	165	30	24	70	C-UCT206-D1
450	SPF-450-S	652	600	510	165	35	26	80	C-UCT207-D1
500	SPF-500-L	702	650	560	215	35	26	80	C-UCT207-D1
600	SPF-600-L	802	750	660	215	35	26	80	C-UCT207-D1
750	SPF-750-S	982	930	810	265	35	26	80	C-UCT207-D1
900	SPF-900-S	1164	1100	960	265	40	32	90	C-UCT208-D1